

This Page Is Inserted by IFW Operations
and is not a part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

IMAGES ARE BEST AVAILABLE COPY.

**As rescanning documents *will not* correct images,
please do not report the images to the
Problem Image Mailbox.**

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification 5 : A61B 17/39</p>	<p>A1</p>	<p>(11) International Publication Number: WO 90/07303 (43) International Publication Date: 12 July 1990 (12.07.90)</p>
<p>(21) International Application Number: PCT/US90/00105 (22) International Filing Date: 8 January 1990 (08.01.90) (30) Priority data: 294,270 6 January 1989 (06.01.89) US (71) Applicant: ANGIOPLASTY SYSTEMS, INC. [US/US]; Post Office Box 3368, Englewood, CO 80155 (US). (72) Inventor: JANSSEN, Michael ; 8179 S. Monaco Circle, Englewood, CO 80155 (US). (74) Agent: SWANSON, Barry, J.; 4582 So. Ulster St. Pkwy., Suite 403, Denver, CO 80237 (US).</p>		<p>(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent). Published <i>With international search report.</i></p>

(54) Title: ELECTROSURGICAL CATHETER FOR RESOLVING ATHEROSCLEROTIC PLAQUE

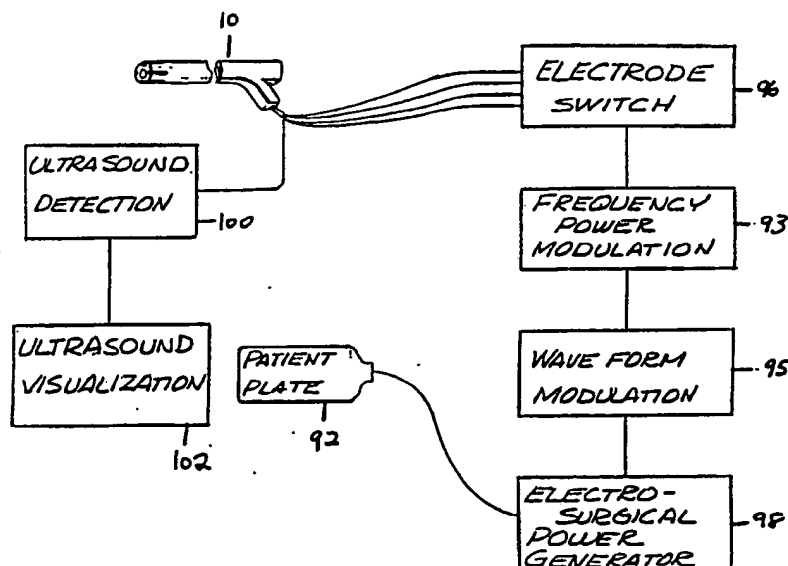

(57) Abstract

A method, and device utilized to practice it, for the resolution of tissue by radio frequency sparking. The device of the present invention having a distal end (20) which is insertable within and along the lumen of a tubular body member and manipulated therethrough to desired position where the device will be operated. The device comprises an elongated flexible hollow tube (12) having a distal end, a proximal end and a diameter smaller than the diameter of the tubular body member into which the device is being inserted; a passage (16) within the tube; a plurality of electrodes (14) adjacent the distal end of the device; and circuitry for selectively supplying radio frequency electrical current to at least one of said electrodes.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MR	Mauritania
BE	Belgium	GA	Gabon	MW	Malawi
BF	Burkina Faso	GB	United Kingdom	NL	Netherlands
BG	Bulgaria	HU	Hungary	NO	Norway
BJ	Benin	IT	Italy	RO	Romania
BR	Brazil	JP	Japan	SD	Sudan
CA	Canada	KP	Democratic People's Republic of Korea	SE	Sweden
CF	Central African Republic	KR	Republic of Korea	SN	Senegal
CG	Congo	LI	Liechtenstein	SU	Soviet Union
CH	Switzerland	LK	Sri Lanka	TD	Chad
CM	Cameroon	LU	Luxembourg	TG	Togo
DE	Germany, Federal Republic of	MC	Monaco	US	United States of America
DK	Denmark				

5 "ELECTROSURGICAL CATHETER FOR RESOLVING ATHEROSCLEROTIC PLAQUE"

Field of Invention

10 The present invention relates to a device and method for resolving or removing atherosclerotic plaque build-up in an artery in order to improve blood flow. The device consists of an electrosurgical catheter which has a plurality of electrode sites, each capable of resolving plaque via radio frequency ("RF") sparking between the electrodes and the plaque. The current generated at the
15 selected electrode is modulated so that the fatty material of the plaque is resolved without creating significant amounts of residue.

Background of the Invention

20 Various angioplasty techniques have been in use for several years. Typically, a catheter is introduced into the body through an artery in the leg or arm and threaded into the artery or blood vessel that has restricted blood flow due to the build-up of
25 atherosclerotic plaque. The most common technique in current practice is balloon angioplasty. The catheter positioned within the subject artery has a deflated balloon at its tip. The balloon is inflated within the artery and the expansion of the balloon is designed to
30 "press" the plaque into the artery wall, thereby minimizing blood flow restrictions. Balloon angioplasty generally just manipulates the form of the plaque, and does not create a significant problem of plaque residue flowing from the site. Unfortunately, balloon angioplasty
35 has several failings and a relatively high complication rate.

Atherosclerotic plaque build-up can exist in a number of different forms. The plaque can be quite hard and scaly or more fatty and pliable. The areas of plaque
40 accumulation are generally not symmetrically located at a

5 particular point in the artery, rather adhering to only
p rti ns of the artery walls.

Considerable efforts have been directed toward
finding improved means to perform angioplasty procedures.
Numerous devices recently have been described that utilize
10 the application of heat to resolve atherosclerotic plaque.
See for example, U.S. Patents Nos. 4,654,024 of Crittendon
et al. and 4,748,979 and 4,672,962 of Hershenson. The
most extensive research concerning the use of heat to
resolve atherosclerotic plaque has been directed toward
15 the area of laser angioplasty techniques. In most laser
angioplasty devices the laser is used simply to supply
heat to the tip of the catheter. See for example, U.S.
Patents Nos. 4,784,133 of Mackin; 4,685,458 of Lechrone;
4,770,653 of Shturman; 4,662,368 and 4,773,413 of Hussein;
20 and 4,732,448 and 4,641,912 of Goldenberg.

The various angioplasty techniques described in
the literature uniformly fail to address the asymmetric
disposition of the plaque within the artery. In most
cases, the tip of the angioplasty catheter acts as if the
25 plaque consists of a uniform symmetric coating on the
interior wall of the artery. Particularly in those
techniques which use something other than pressure to
manipulate the plaque, the resolving forces are applied
indiscriminately to the plaque and to the healthy tissue
30 within the artery.

Radio frequency sparking to cut or cauterize
tissue as a medical procedure is common in the prior art.
There are two basic classes of electrosurgical devices.
Monopolar devices consist of a high-frequency electrical
35 (generally RF) generator, a cutting or cauterizing
electrode or needle, and a patient plate. The patient
plate is attached to the body of the patient, and acts as
the return electrode for completion of the RF circuit.
Cutting occurs due to the heat generated by RF sparking
40 from the electrode to the patient's body tissue. The

5 shape of the electrode concentrates the RF energy, thus
creating the high temperature spark. Appropriate
modulation of the frequency determines whether cutting or
cauterizing will occur. The relatively larger surface
10 area of the patient plate, which is in contact with the
patient's body, prevents the current flow from
concentrating at one point. This prevents the RF current
from burning the patient as the current exits the body.

There are also several bipolar electrosurgical
devices described in the prior art. Bipolar devices
15 consist of a high frequency electrical generator and an
instrument that contains both the delivery and return
electrode. RF sparking occurs between the two self-
contained electrodes of the instrument. The bipolar
electrosurgical devices of the prior art are generally
20 inadequate due to the conditions necessary to create
bipolar sparking. The most fundamental difficulty is that
bioactive electrodes must have a roughly equal voltage
drop at both the delivery and return electrodes. The high
power current required in order to achieve bipolar arcing
25 often causes extraneous sparking, particularly when there
is unequal contact with the surrounding tissue.

The extension of known electrosurgical
processes--utilizing RF sparking--to angioplasty
techniques is relatively unexplored. A disclosure of a
30 monopolar electrosurgical catheter for use in resolving
atherosclerotic plaque is found in U.S. Patent No.
4,682,596 of Bales. The mono and bipolar devices in Bales
describe a hollow catheter with a hollow tip member. Only
one potential electrode, at the catheter tip, is
35 envisioned by the Bales patent. Bales briefly describes
the utilization of variously modulated waveforms in order
to resolve atherosclerotic plaque, and the application of
high power levels while minimizing the creation of
excessive amounts of heat. However, means are included
40 for removing residue from the plaque destruction site,

5 indicating that the modulation techniques employed have not been maximized. It should be possible to destroy the plaque in such a manner so as to eliminate significant residue formation.

10 An article by Cornelius J. Slager et al. in the Journal of the American College of Cardiology entitled "Vaporization of Atherosclerotic Plaque by Spark Erosion" (June 1985, pp. 1382-6) describes the use of a bipolar RF sparking catheter. Again, there is a single spark generating electrode. The sparking frequency is modulated, but not to optimize ablation. Synchronous transmission of energy with cardiac contraction is employed in order to minimize the disruption of electrical pathways in the heart.

20 U.S. Patent No. 4,643,186 of Rosen describes an "antenna" type bipolar RF sparking catheter for use in angioplasty. The delivery and return electrodes are configured in such a way that the electrodes terminate together to form an "antenna."

25 When current is supplied to the antenna, RF sparking will occur. The addition of balloon means encapsulating the sparking antenna is also described. Rosen discloses coating the interior surface of such balloons in order to supply some control over the direction of sparking. Such directional manipulation can only be accomplished before the catheter is introduced into the patient's body. No means are disclosed for directing the random sparking of the "antenna" once introduced into the desired artery.

35 An example of an asymmetrically shaped electrode or energy applicator is seen in U.S. Patent No. 4,311,154 of Sterzer. The Sterzer patent discloses a device to be used in the treatment of a cancerous tumor with high temperatures, or hypothermia. Sterzer describes a device for hypothermic treatments utilizing microwave energy so that heat radiates nonsymmetrically from the surface of

40

5 th instrument. Sterzer does not utilize RF sparking and,
like the Rosen patent, does not contemplate the use of
means for directing the energy once the device is in place
within the body.

10 The examples discussed above where RF sparking
has been used for the resolution of atherosclerotic plaque
employ relatively unsophisticated means. The RF spark is
a very powerful and intense force to be let loose within
the human body. Means for effectively harnessing the vast
potential of RF sparking angioplasty have not been
15 disclosed prior to this invention.

Summary of the Invention.

20 This invention relates to an improved device for
the ablation or resolution of atherosclerotic plaque by
use of RF sparking. The present invention adapts the
electrosurgical electrode so that it may be incorporated
into a catheter that may be manipulated to an arterial
site of atherosclerotic plaque. The RF angioplasty
catheter of the present invention has a segmented head, so
that it is possible to control nonsymmetrical sparking
25 from a plurality of electrodes.

30 Combined with real time visualization techniques,
the device of the present invention allows for greater
control and precision when utilizing RF sparking to
resolve atherosclerotic plaque. The RF spark is an
extremely powerful and concentrated source of heat within
the artery. By the use of a segmented catheter head, the
somewhat random nature of the sparking may be actively
directed towards the section of the artery surface
containing the plaque build-up of interest.
35 Controlling the direction of sparking from the

40 electrode head makes it possible to increase the energy of
the RF current utilized. By employing increased energy
sparks, the material making up the atherosclerotic plaque
may be almost totally disintegrated. The material

5 constituting the plaque may be reduced to such fine
particles that removal of residue from the plaque
resolution site is not necessary.

10 It is necessary to optimize the modulation of the
RF current delivered to the sparking site. Even though
the segmented catheter head greatly increases the
specificity of the sparking action, it is still crucial to
minimize temperature increases in the tissues surrounding
the plaque. The higher energy sparks employed requires
that pulsed modulation of the frequency be carefully
15 controlled in order to allow the dissipation of heat to
occur between the heat-generating spark pulses.

The catheter device of the present invention may
have an elongated flexible hollow body that has a single
open cavity capable of delivering fluids to the site of
20 plaque resolution. At the far, or distal end, of the
device, there is a plurality of sparking sites or
electrodes spaced about the exterior circumference of the
generally cylindrical catheter device. The RF energy
transmitted to the distal end of the catheter may be
25 selectively applied to any one of the various electrodes.
Visualization of the artery will determine which wall or
walls of the artery contain the plaque build-up to be
resolved and will determine which electrode should be
activated.

30 Brief Description of the Drawings

FIG. 1 is an isometric view of the distal end of
an embodiment of the present invention.

35 FIG. 2 is a schematic view of a monopolar
embodiment of the present invention.

FIG. 3 is a fragmentary axial cross-sectional
view of the embodiment of the invention shown in FIG. 1.

FIG. 4 is a distal end view of the device shown
in FIG. 3.

5 FIG. 5 is a radial sectional view of the device shown in FIG. 3 and is taken along the line 5-5 of FIG. 3.

 FIG. 6 is another radial sectional view of the device shown in FIG. 3 and is taken along the line 6-6 of FIG. 3.

10 FIG. 7 is an isometric view of the distal end of an embodiment of the present invention.

 FIG. 8 is a distal end view of an embodiment of the invention.

15 FIG. 9 is a radial sectional view analogous to FIG. 6 of an embodiment of the device.

 FIG. 10 is a radial sectional view analogous to FIG. 5.

 FIG. 11 is a radial sectional view analogous to FIG. 6.

20 Description of the Preferred Embodiment.

 FIG. 1 shows the distal end 20 of a atherosclerotic plaque resolving device constructed according to the teachings of the present invention.

25 FIG. 3 shows a cross-sectional view of the entire device, which is generally referred to, in total, as numeral 10. The device 10 is constructed, both by use of the appropriate size and materials, so that it may be inserted within and along the lumen of a blood vessel. Such devices are generally referred to as catheters, and may be manipulated to the desired location in the blood vessel or artery. The desired location is the site of atherosclerotic plaque build-up. Usually, the plaque site is causing reduced blood flow through the vessel or artery.

35 The device and method of the present invention is particularly suited for the ablation of atherosclerotic plaque located within the arteries leading to the heart. The device and method disclosed herein has, however, significant advantages over the prior art that may be

40

5 us ful in a number of invasive surgical techniques. The
 d vic of th present invention may be used, for example,
 in the following procedur s: the ablative treatment of
 fallopian tubes; the removal of colon obstructions, the
 removal of blood clots or tissue build-up within the blood
10 vessels of the brain; and the removal of undesirable
 intestinal tissue. In each of these surgical
 procedures--and in the other invasive surgical
 techniques--a catheter is manipulated to the desired
 location within the body via the lumen of a tubular body
15 member, and energy is applied to the distal end of the
 catheter in order to ablate or resolve tissue.

 Introduction of the device 10 to the appropriate
 site may be accomplished by use of a guidewire. A
 guidewire, with the appropriate bends and turns, is
20 "threaded" through an arterial pathway to the desired
 point of plaque build-up. The device 10 may then be
 easily passed over the path of the guidewire to the
 correct arterial site.

 The device 10 includes an elongated hollow tubular
25 body 12. The body 12 is usually flexible, and constructed
 of an electrically insulative material. Any of a number
 of polymeric or plastic materials may be employed for this
 purpose. The distal end 20 of the device 10 includes a
 plurality of electrodes 14. The electrodes 14 each
30 constitute a monopolar electrosurgical electrode. The
 electrodes 14 may be constructed of any conductive metal
 or metallic alloy that is capable of retaining its form or
 shape when exposed to the extremely high temperatures
 generated by RF sparking. For example, the electrodes 14
35 may be composed of stainless steel, tungsten, platinum,
 titanium, zirconium or any of the other so-called
 refractory metals. Alloys of the refractory metals may
 also be employed.

 The distal end 20 of the device includes a
40 generally flat end surface 22. The interior 16 of the

5 tubular body 12 of the catheter 10 has a generally
constant diameter throughout the axial length of the
catheter. Each of the electrodes 14 is separated from
each other by the insulative material of the tubular body
12, and exists in part on the circumference of the
10 exterior surface of the tubular body 12 adjacent to the
end surface 22, and in part planar to the end surface 22.
Each electrode 14, therefore, consists of front 15 and
radial 17 elements that are of unitary construction. The
RF energy selectively delivered to each of the electrodes
15 14 will create sparking from the electrode 14 to the
atherosclerotic plaque.

In a monopolar device of the present invention as
is schematically shown in FIG. 2, the return path for the
RF current introduced into the body tissue is through a
20 patient plate 92. The patient plate 92 is a relatively
large dispersive plate that is attached to the body of the
patient in order to establish contact with a significant
amount of body surface area. The patient plate is
typically placed onto the hip, thigh, buttock or belly of
25 the patient. Conduction from the patient to the return
electrode is maximized by applying electroconductive gel
to the points of contact.

The device 10 may also be constructed as a
"bipolar" RF sparking source. In such an embodiment, a
30 single return electrode may be included among the
plurality of electrodes 14 at the distal end of the device
10. The RF sparking would thereby proceed from the
selected electrode 14 to the return electrode. In such an
embodiment a single return electrode may be a large
35 conductive ring 93 distal to electrodes 14 with a surface
area from 5 to 20 times larger than that of any of the
delivery electrodes 14. In another bipolar embodiment of
the present invention, the power generator output and
return may be adapted so that any one of the plurality of
40 electrodes can serve as either the delivery or return

5 el ctr de. For example, if the electrodes 14 in the
d vice shown in FIG. 1 were numbered A-D and the plaque
adjacent electrode A is twice that adjacent to
electrodes B and C with the artery nearest electrode D
containing no plaque, electrode A would be selected as the
10 return electrode and B and C would be alternated as the
delivery or anodic cathode. The plaque adjacent electrode
A would receive twice the sparking energy as that adjacent
electrodes B and C, and that adjacent electrode D would
receive minimal amounts. In this embodiment, the
15 directional specificity of sparking can be further
controlled.

The device 10 is attached to and activated by a
high-frequency, high voltage power supply 98. There are
several such power generators marketed for use in
20 electrosurgery. Typically, the energy is radio-frequency.
Each electrode 14 is coupled to the power supply via a
wire conductor 40 that runs the entire length of the
tubular body 12. Each wire 40 may be electrically
insulated.

25 The proximal end 50 of the catheter 10 has a "Y"
shaped portion 52 that has a straight through passage 53
and a branch passage 54. The interior 16 of the tubular
body 12 may be accessed from either the straight through
53 or the branch 54 passage. The wire conductors 40 are
30 coupled to the generator, and prior to insertion into the
catheter 10 via the branch passage 54 may be bundled
together to form a single transmission wire 42, as shown
in FIG. 9, or may remain separated.

The RF generator 98 must be adapted via an
35 electrode switching device 96 such that the output of the
generator may be selectively applied to one of the wire
conductors 40, and therefore to one of the electrodes 14.
Further modification of the generator via a device for
waveform modulation 95 must be performed in order to
40 create the optimized modulated waveform. The optimal

5 waveform provides a RF pulse of energy strong enough to
create a spark that will disintegrate the atherosclerotic
plaque with minimum residue formation. At the same time,
the waveform must be modulated such that there is not an
excess heat build-up in the tissue adjacent to the plaque
10 destruction site. Appropriate time periods in which heat
may be dissipated between bursts of energy will enable
adequate cooling periods for the adjacent tissues.

It is thought that commonly available
electrosurgery generator units may be adapted to provide
15 the proper RF current; for example, a Bovie "Specialist"
75 Watt ES, Electro-Surgery Unit or similar Valleylabs
unit. The frequency of the wave form employed will be
between 0.05 and 200 megahertz and the voltage will have a
magnitude of several hundred volts. To achieve the
20 optimum output modulation, a digital controller 93 will be
connected in series with the generator to control pulse
width of RF burst, on and off times and number of pulses.

The transmission wire 42 or wire conductors 40
enter the catheter 10 via the branch passage 54 at the
25 proximal end 50 of the catheter 10. In FIG. 9, the
embodiment of the invention utilizing a single
transmission wire 42, the transmission wire 42, which
contains each of the wire conductors 40, is constructed so
that each of the wire conductors 40 is electronically
30 insulated from each other. In addition, the exterior
surface of the transmission wire 42 is coated with an
insulating material. In the preferred embodiment of the
invention, each of the wire conductors 40 will be
separately insulated, and will proceed separately through
35 the catheter as seen in FIGs. 3, 5 and 6.

FIG. 6 shows a radial sectional view of the
catheter 10 at a point between its distal 20 and proximal
50 ends. As is shown, the wire conductors 40 are located
within the interior cavity 16 of the tubular body 12. The
40 wire conductors 40 are designed so that they will not take

5 up significant amounts of the interior volume of the
tubular body 12 and that the individual wires will not
cross talk with each other. Room must be allowed for the
passage of fluids to the plaque destruction site or to
encompass the guide wire used to properly place the
10 catheter 10.

As can be seen in FIG. 3, the wire conductors 40
run nearly the full length of the tubular body 12. At
some point 45 just adjacent the distal end 20 of the
catheter 10, the individual wire conductors 40 proceed
15 through the tubular body 12 and are coupled to the
electrodes 14. FIG. 5 is a radial sectional view of the
catheter 10 at the point 45 where the wire conductors 40
each connect to its corresponding electrode 14.

FIGS. 10 and 11 show an additional embodiment of
20 the invention wherein the wire conductors 40 are
separately contained within separate lumens within the
tubular body of the cathode 10.

The device 10 of the present invention is used
for resolving or ablating atherosclerotic plaque or clots
within the interior of vessels or arteries. The method of
25 plaque resolution with such a device requires the use of
some means for visualizing the interior of the vessel
where plaque destruction is to occur. This can be
accomplished by placing ultrasound transducers 85, as
shown in FIG. 7 at the catheters distal end or under the
30 electrodes 14. The transducers 85 send and receive
ultrasonic signals which are processed using traditional
ultrasonic processing means 100 and this displayed on
video terminals 102 as shown in FIG. 2. Other
35 visualization techniques would include, but would not be
limited to, the following: the introduction of
radionuclear dyes that allow for radiographic
visualization use of other dyes suitable for introduction
at the site of plaque destruction--or in the bloodstream
generally--that are detectable by X-ray or other detection
40

5 techniques, high resolution biplane angiography, and fiber
optics introduced along the catheter pathway that provide
an actual picture of the interior of the artery or vessel.

Whatever means are used to determine the site of
plaque build-up that requires treatment, the initial step
is generally the placement of the catheter adjacent to the
10 proposed destruction site. As described above, the
appropriate positioning may be accomplished with the aid
of a guidewire. Guidewires are constructed so that the
wire will be introduced into an artery--either through the
leg or arm--and threaded to the desired position. The
15 placement of catheters is a well known and often performed
procedure in connection with balloon angioplasty and other
invasive surgical procedures. In the present invention
the placement is critical not only with respect to the
extension of the catheter distal end through an artery,
20 but also with respect to the circumferential orientation
of the catheter since the RF energy is applied
differentially along the circumference to correspond to
differential plaque build-up.

When utilizing a guidewire to help manipulate the
25 distal end 20 of the catheter 10 to the appropriate
location, the end of the guidewire exiting the patient may
be used to guide the catheter 10 by use of the hollow
interior 16 of the tubular body 12. The guide wire can be
30 removed from the interior of the catheter when resolution
is to begin, or may be maintained in place if required by
the attending physician.

The interior cavity 16 of the catheter 10 may
also be used to introduce fluids to the site of plaque
35 destruction. For example, as an aid to visualization it
may be desirable to flush the plaque destruction site.
The introduction of dyes to aid the visualization process
may also be accomplished via the interior cavity 16.

The interior cavity may also be valuable in order
40 to place a fiber optic element at the site of

5 atherosclerotic plaque build-up. This could be accomplished by removal of the guidewire and introduction of the fiber optic--guided through the interior chamber--to the appropriate site.

10 The electrodes 14 at the tip of the distal end 20 of the tubular body 12 are shaped so that sparking may occur in both forward and radial directions. It is therefore possible to resolve plaque that has built up to such an extent that the catheter 10 is prevented from proceeding further along the arterial pathway. RF
15 sparking from the front portions of the electrodes 14 will allow some forward directed sparking. Generally, the exterior diameter of the tubular body 12 is sized such that it is substantially smaller than the interior diameter of the arteries and vessels it will be encompassed by. Unless the atherosclerotic plaque
20 build-up has progressed extremely far, it should be possible to place the distal end 20 of the catheter 10 in a position so that the plaque to be resolved will be generally planar to the side elements 17 of the electrode 14 selected to ablate the plaque.

25 Once the distal end 20 of the catheter 10 is properly placed, the operator must determine by consultation with the visualization technique utilized which surfaces of the artery or vessel require ablation. Rather than the random sparking delivered from the RF
30 sparking electrodes of the current devices, it is possible to direct sparking towards those surfaces that require ablation.

35 In an additional embodiment of the device 10 (shown in FIGs. 7 and 8), the electrodes 14 consist of a plurality of split rings spaced along the exterior surface of the distal end 20 of the catheter. Each of the split rings 80 are separated from each other by a relatively small amount of the insulative material that comprises the
40 bulk of the catheter 10. Each ring 80 is "split" into a

5 plurality of separate electrodes by equally spaced
portions of insulative material. In such an embodiment it
may be useful to incorporate end electrodes 89 on the
relatively flat end of the distal end 20 of the catheter
10 as seen in FIG 8. It would be possible to include a
narrowed opening into the interior of the catheter to
allow the expulsion of dyes or an interior catheter, as
shown, or to "cap" the hollow catheter 10.

The embodiment of the invention shown in FIGs. 7
and 8, as can the embodiment shown in Fig. 1, may be
15 adapted to serve as either monopolar or bipolar
electrosurgical catheters. The embodiment shown in FIG. 7
has a total of 12 electrodes. When adapted to perform as
a bipolar device in which each of the 12 electrodes may be
selected to function as the anode or the cathode, the
20 locational specificity for sparking at the site of plaque
build-up is greatly enhanced. In such an embodiment, in
addition to means for optimally modulating the wave form
of the current flowing from the generator, the electrode
switching means 96 must be adapted to select which of the
25 electrodes will serve as the anode and which will serve as
the cathode or return path.

CLAIMS

5

1. An electrosurgical tissue resolving device having a distal end which is insertable within and along the lumen of a tubular body member and manipulated there-
10 through to a desired position where the device is operated to resolve tissue by radio frequency sparking, said device comprising:

15

(a) an elongated flexible hollow tube having a distal end, a proximal end, and a diameter smaller than the diameter of the tubular body member into which said device is being inserted;

(b) passage means within said tube;

(c) a plurality of electrodes adjacent to said distal end; and

20

(d) selection means for selectively supplying a radio frequency electrical current to at least one of said electrodes

25

2. The device of claim 1 wherein said radio frequency sparking occurs between said electrodes and said tissue and the current returns to said selection means via a patient plate attached to a remote portion of the subject.

3. The device of claim 2 wherein said tissue is atherosclerotic plaque.

30

4. The device of claim 2 wherein said tissue is a portion of the fallopian tube.

5. The device of claim 2 wherein said tissue is a blood clot or tissue build-up in the blood vessels of the brain.

35

6. The device of claim 2 wherein said tissue is intestinal blockage.

7. The device of claim 2 wherein said tissue is colon blockage.

40

8. The device of claim 2 wherein said electrodes consist of front elements and radial elements.

45

5 9. The device of claim 2 further comprising modulation means for modulating the wave form of said radio frequency electrical current so that said sparking will disintegrate said tissue while minimizing heat build-up in tissue adjacent to said tissue.

10 10. The device of claim 2 further comprising means for adjusting the electrical currents frequency, voltage and current so that said sparking will disintegrate said tissue while minimizing heat build-up in tissue adjacent to said tissue.

15 11. The device of claim 2 wherein said electrodes are composed of a refractory metal selected from the group consisting of stainless steel, tungsten, platinum, zirconium and titanium.

20 12. The device of claim 2 wherein said tube is an electrically insulative material.

 13. The device of claim 2 wherein said electrodes are electrically associated with said selection means via individual wires carried within said hollow interior of said tube.

25 14. The device of claim 2 wherein said proximal end has a "Y" shaped portion consisting of a straight through passage and a branch passage, and said straight through passage may be associated with means for supplying or removing fluids from the site of tissue resolution.

30 15. The device of claim 2 further comprising ultrasound transducers adjacent to said electrodes at said distal end.

35 16. The device of claim 2 wherein said electrodes consist of a plurality of split rings adjacent said distal end.

 17. The device of claim 16 further comprising electrically insulated end electrodes.

40 18. The device of claim 1 wherein one of said electrodes serves as a return electrode and said radio frequency sparking occurs between said electrodes and said return electrode.

5 19. The device of claim 18 further comprising
means for selecting which of said electrodes will serve as
said return electrode.

 20. The device of claim 18 wherein said tissue
is atherosclerotic plaque.

10 21. The device of claim 18 wherein said tissue
is a portion of the fallopian tube.

 22. The device of claim 18 wherein said tissue
is a blood clot or tissue build-up in the blood vessels of
the brain.

15 23. The device of claim 18 wherein said tissue
is prostate blockage.

 24. The device of claim 18 wherein said tissue
is colon blockage.

20 25. The device of claim 18 wherein said
electrodes consist of front elements and radial elements.

 26. The device of claim 18 further comprising
modulation means for modulating the wave form of said
radio frequency electrical current so that said sparking
will disintegrate said tissue while minimizing heat
build-up in tissue adjacent to said tissue.

25 27. The device of claim 18 further comprising
means for adjusting the electrical currents frequency,
voltage and current so that said sparking will
disintegrate said tissue while minimizing heat build-up in
tissue adjacent said tissue.

30 28. The device of claim 18 wherein said
electrodes are composed of a refractory metal selected
from the group consisting of stainless steel, tungsten,
platinum, zirconium and titanium.

35 29. The device of claim 18 wherein said tube is
an electrically insulative material.

 30. The device of claim 18 wherein said
electrodes are electrically associated with said selection
means via individual wires carried within said hollow
interior of said tube.

5 31. The device of claim 18 wherein said proximal end has a "Y" shaped portion consisting of a straight through passage and a branch passage, and said straight through passage may be associated with means for supplying or removing fluids from the site of tissue resolution.

10 32. The device of claim 18 further comprising ultrasound transducers adjacent to said electrodes at said distal end.

15 33. The device of claim 18 wherein said electrodes consist of a plurality of split rings adjacent said distal end.

 34. The device of claim 33 further comprising electrically insulated end electrodes.

20 35. The device of claim 1 further comprising means for visualizing the interior surfaces of said desired position within said tubular body member.

 36. The device of claim 35 wherein said means employ ultrasound information.

 37. The device of claim 35 wherein said means employ fiber optics.

25 38. The device of claim 35 wherein said means employ radionuclear dyes.

 39. The device of claim 35 wherein said means employ high resolution biplane angiography.

30 40. A method of reducing the flow restriction effects of plaque or tissue located at a point in a tubular body member, comprising:

 (a) obtaining access to the interior of said tubular body member;

35 (b) inserting the distal end of catheter means consisting of an electrical conductors terminated in a plurality of electrodes into said tubular body member;

 (c) adjusting the position of said electrodes adjacent to said point;

40 (d) applying radio frequency energy to the distal end of said transmission line selectively so that

5 said energy will cause sparking from at least ne of said
electr des.

41. The method described in claim 37 wh rein
said sparking occurs between said electrodes and said
tissue and the current exits the subject via a patient
10 plate.

42. The method described in claim 37 wherein one
of said electrodes serves as a return electrode and said
sparking occurs between said electrodes and said return
electrode.
15

20

25

30

35

40

45

SUBSTITUTE SHEET

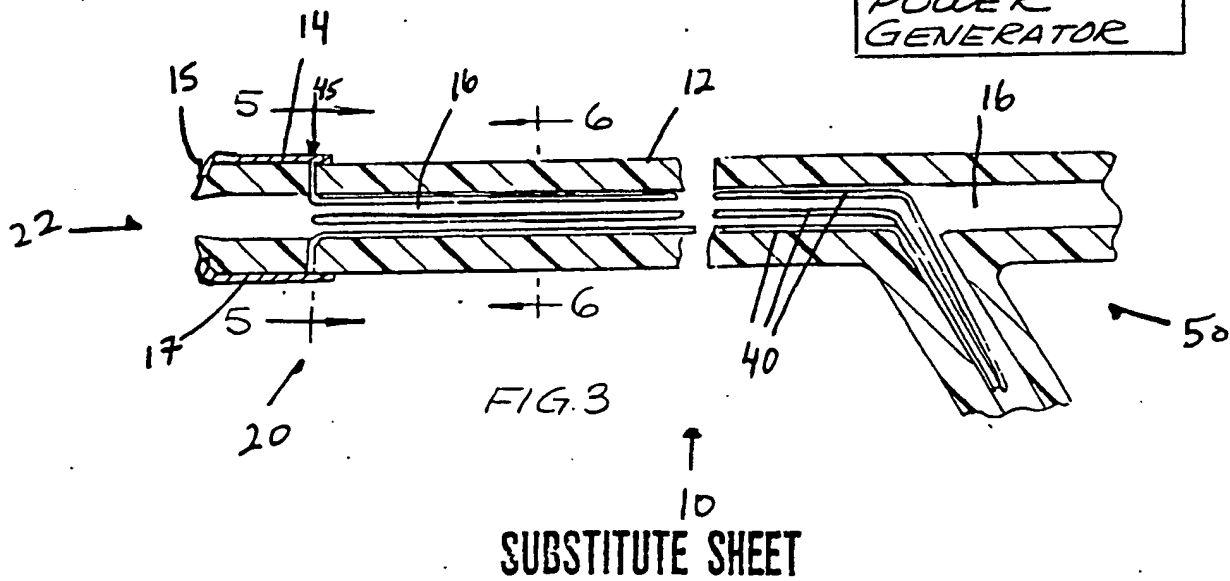
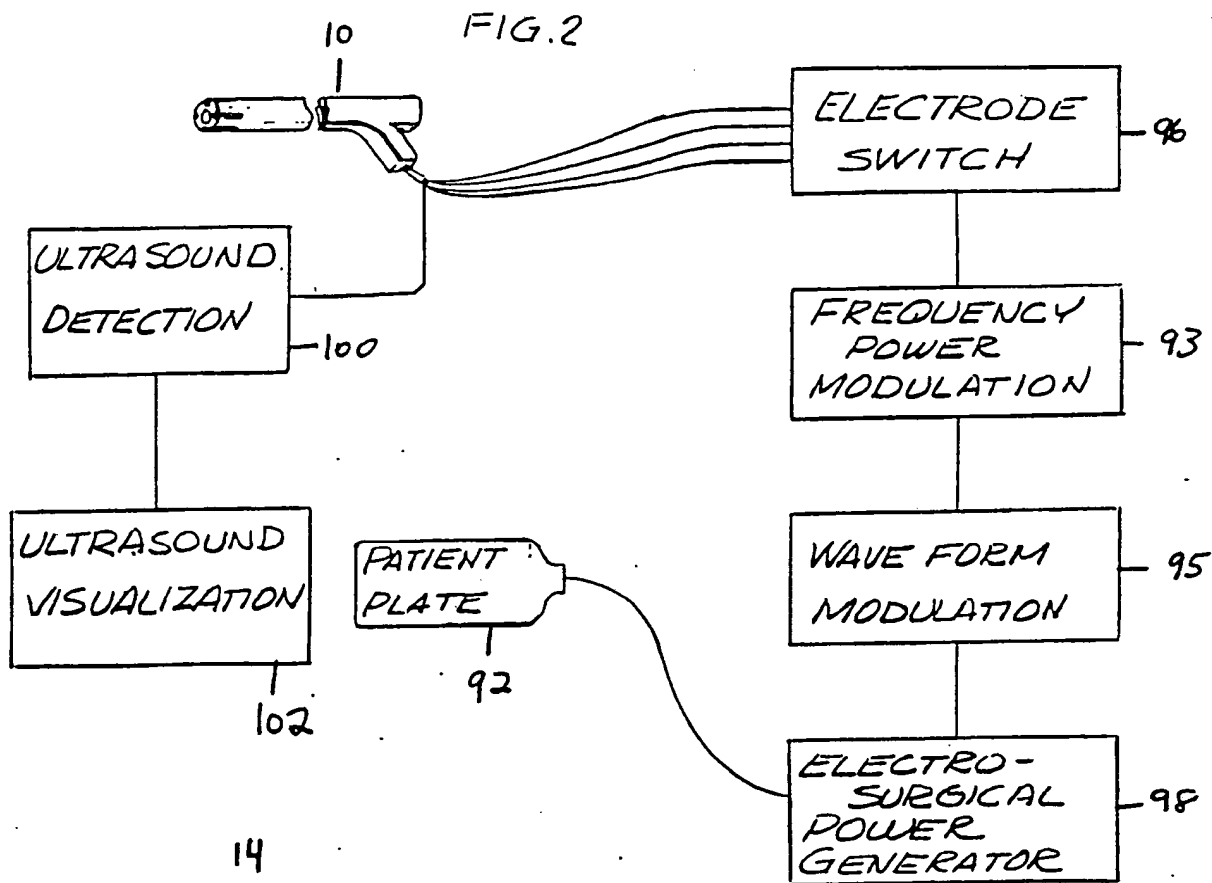
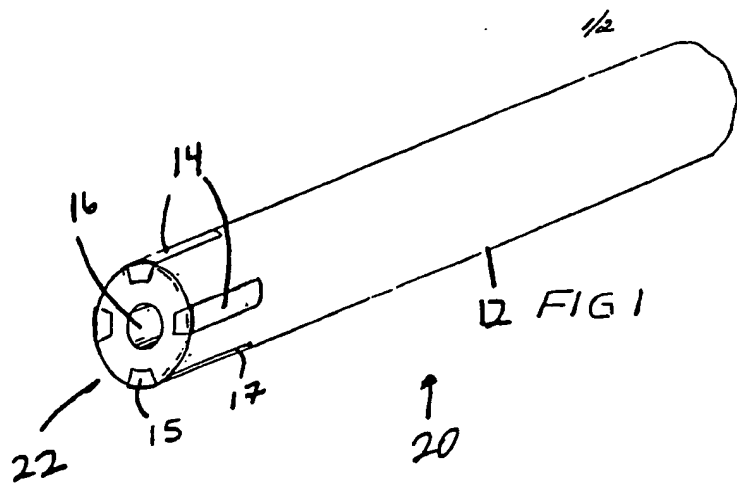


FIG 4

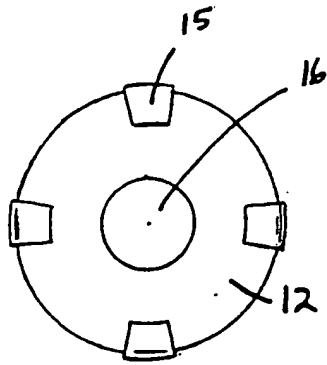


FIG 9

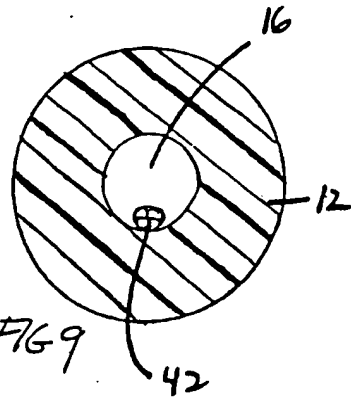


FIG 5

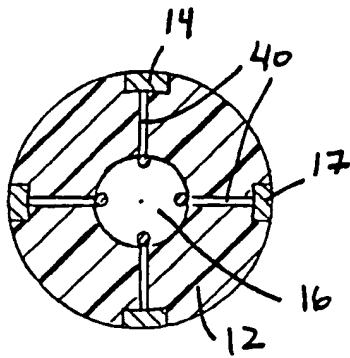


FIG 10




FIG. 6




FIG. 11


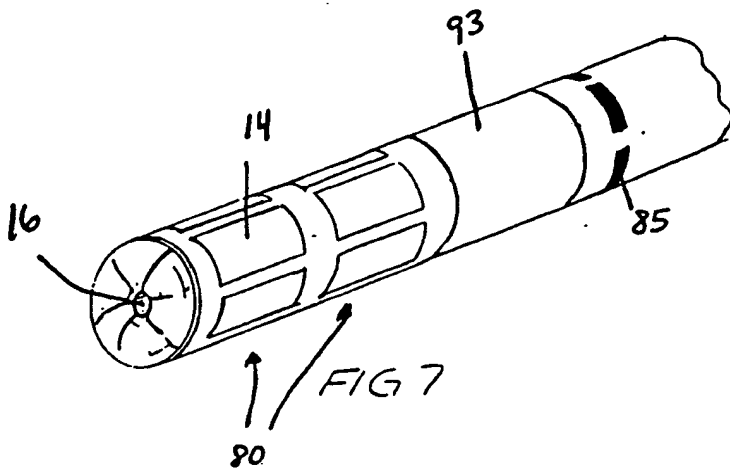



FIG 8

INTERNATIONAL SEARCH REPORT

International Application No. PCT/US90/00105

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) ⁶

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC(5) A 61 B 17/39

U.S. CL. 128/660.03; 606/48; 606/50 606/41

II. FIELDS SEARCHED

Minimum Documentation Searched ⁷

Classification System

Classification Symbols

U.S.

128/660.03, 786

606/33, 34, 41, 42, 45, 46, 48, 49, 50

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched ⁸

III. DOCUMENTS CONSIDERED TO BE RELEVANT ⁹

Category ¹⁰	Citation of Document, ¹¹ with indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X Y	US,A, 4,532,924 (AUTH), 06 AUGUST 1985. See entire document.	1, 18-25, 29, 30, 33, 34
Y	US,A, 4,576,177 (WEBSTER), 18 MARCH 1986. See entire document.	8, 16, 17
A	US,A, 4,643,186 (ROSEN), 17 FEBRUARY 1987. See entire document.	15, 32, 35-39
X Y	US,A, 4,682,596 (BALES), 28 JULY 1987. See entire document.	1
A	DE,A, 3,516,830 (HUBMANN), 13 NOVEMBER 1986. See entire document.	1-7, 9-14, 18, 20-24, 26-31, 40-42
A	JOURNAL OF THE AMERICAN COLLEGE OF CARDIOLOGY, issued 1985, C. Slager, "Vaporization of Atherosclerotic Plaques by Spark Erosion", see pages 1382-1386.	8, 16, 17

¹⁰ Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

Date of Mailing of this International Search Report

07 February 1990

International Searching Authority

ISA/US

13 MAR 1990

Signature of Authorized Officer

Lee S. Cohen